

BKT

GROWING TOGETHER

ATV

LAWN & GARDEN / ALL TERRAIN SPORT TIRES





LAWN & GARDEN / ALL TERRAIN SPORT TIRES

ATV

Whether you love competitive sport or traveling through natural landscapes, BKT has the right tire for your ATV. We design and build tires that are able to withstand all stress ATVs are continuously subject to especially under extreme conditions while riding over dry grounds or mud on tortuous paths, or rocky surfaces. In short: no matter which challenge you are going to face, BKT is by your side ensuring safety, performance, and great fun.

TECHNOLOGIES AND PERFORMANCE



M+S



Deep Tread



Extra Deep Tread



Sport



Comfort



Traction



Durability



On/Off Road



Field Protection



Steering Control



Radials

Radial tires have cord plies that are arranged running radially from bead to bead around the tire. Sidewall and tread have independent functional features providing more flexibility, great performance, durability, and fuel economy.



Bias

Bias tires have cord plies that are arranged running diagonally from bead to bead across the tire. Layers overlap forming a crisscross pattern. This design features extraordinary sidewall resistance, puncture resistance and high load capacity.

ATV TIRES


SIERRA MAX



[p. 6]


BOGMAX



[p. 7]


W 207



[p. 8]


AT 108



[p. 16]


AT 109



[p. 18]


AT 110



[p. 19]


AT 111



[p. 10]


AT 111 HD



[p. 12]


AT 171



[p. 14]


AT 112



[p. 20]


AT 119



[p. 21]





Radial



SIERRA MAX

SIERRA MAX is the BKT tire for both all-terrain and lawn and garden applications. Its radial construction provides a significantly smoother and more comfortable ride over extreme terrains such as deserts, or dirty and rocky surfaces. The special tread design along with its wider footprint provides outstanding forward and lateral traction.

Ø 12"	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
	25 X 8 R 12									available soon
	25 X 10 R 12									available soon
	26 X 9 R 12									available soon
	26 X 11 R 12									available soon

Ø 14"	Tire size	LI/SS	Rec.	Alt.	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
	AT 26 X 9 R 14	48 F	7.00	-	230	675	-	-	-	STD
	AT 26 X 11 R 14	54 F	9.00	-	280	675	-	-	-	STD
	AT 27 X 9 R 14	50 F	7.00	-	230	700	-	-	-	STD
	AT 27 X 11 R 14	56 F	9.00	-	280	700	-	-	-	STD

STD: Standard



BOGMAX

BOGMAX has been specially designed for all-terrain applications. The very deep tread pattern ensures excellent traction whereas the sidewall protectors reduce impacts and possible damages. BOGMAX is a 6-ply-rated tire with M+S technology - perfect for sport performance in every condition.

Ø 14"	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS
		Rec.	Alt.								
	AT 30 X 10 - 14	7.0 AT	7.5 AT; 8.0 AT	260	760	-	-	STD	6	TL	58 F
	AT 32 X 10 - 14	8.0 AT	8.5 AT	250	810	-	-	STD	6	TL	62 F

STD: Standard



Technologies



M+S

Performance



Sport



Comfort



Traction



Bias

Technologies



Deep Tread



M+S

Performance



Sport



Traction



W 207

W 207 is BKT's ATV tire for all-terrain sports. Thanks to M+S technology and a special design, it provides the best traction in any condition. This tire features an excellent puncture resistance over challenging terrains.

Technologies



Performance



Ø 8"	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS
		Rec.	Alt.								
	AT 22 X 11 - 8	9.0 AT	8.5 AT	272	561	-	-	STD	6	TL	-
Ø 9"	AT 22 X 11 - 9	9.0 AT	8.5 AT	272	561	-	-	STD	6	TL	-
	AT 25 X 12 - 9	9.5 AT	9.0 AT; 10.0 AT	300	632	-	-	STD	6	TL	-
	AT 25 X 13 - 9	10.5 AT	10.0 AT	330	635	-	-	STD	6	TL	-
Ø 10"	AT 22 X 11 - 10	9.0 AT	8.5 AT	272	561	-	-	STD	6	TL	-
	AT 22 X 7 - 10	5.5 AT	6.0 AT	178	559	-	-	STD	6	TL	-
	AT 22 X 8 - 10	6.5 AT	6.0 AT	203	559	-	-	STD	6	TL	-
	AT 23 X 10 - 10	8.0 AT	7.5 AT; 8.5 AT	249	587	-	-	STD	6	TL	-
	AT 23 X 7 - 10	5.5 AT	6.0 AT	177	584	-	-	STD	6	TL	-
	AT 23 X 8 - 10	6.5 AT	6.0 AT	203	589	-	-	STD	6	TL	-
	AT 24 X 11 - 10	9.0 AT	8.5 AT	279	610	-	-	STD	6	TL	-
	AT 25 X 11 - 10	9.0 AT	8.5 AT	285	640	-	-	STD	6	TL	-
	AT 25 X 12 - 10	9.5 AT	9.0 AT; 10.0 AT	297	640	-	-	STD	6	TL	-
	Ø 11"	AT 23 X 8 - 11	6.5 AT	6.0 AT	203	584	-	-	STD	6	TL
AT 24 X 10 - 11		8.0 AT	7.5 AT; 8.5 AT	249	612	-	-	STD	6	TL	-

STD: Standard



Ø 11"	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS
		Rec.	Alt.								
	AT 24 X 8 - 11	6.5 AT	6.0 AT	203	612	-	-	STD	6	TL	-
	AT 24 X 9 - 11	7.0 AT	7.5 AT	226	610	-	-	STD	6	TL	-
	AT 25 X 10 - 11	8.0 AT	7.5 AT; 8.5 AT	249	638	-	-	STD	6	TL	-
	AT 25 X 8 - 11	6.5 AT	6.0 AT	203	638	-	-	STD	6	TL	-
Ø 12"	AT 24 X 8 - 12	6.5 AT	6.0 AT	198	615	-	-	STD	6	TL	-
	AT 25 X 10 - 12	8.0 AT	6.5 AT; 7.5 AT; 8.5 AT	249	638	-	-	STD	6	TL	-
	AT 25 X 11 - 12	9.0 AT	8.5 AT	284	638	-	-	STD	6	TL	-
	AT 25 X 8 - 12	6.5 AT	6.0 AT	198	638	-	-	STD	6	TL	-
	AT 25 X 8 - 12	6.5 AT	6.0 AT	198	638	-	-	SPL	6	TL	-
	AT 26 X 10 - 12	8.0 AT	7.5 AT; 8.5 AT	241	658	-	-	STD	6	TL	-
	AT 26 X 12 - 12	9.5 AT	8.0 AT; 8.5 AT; 9.0 AT	299	658	-	-	STD	6	TL	-
	AT 26 X 8 - 12	6.50 AT	6.00 AT	204	660	-	-	STD	6	TL	-
	AT 27 X 10 - 12	8.0 AT	7.5 AT; 8.5 AT	241	683	-	-	STD	6	TL	-
	AT 27 X 12 - 12	9.5 AT	8.5 AT; 9.0 AT	299	683	-	-	STD	6	TL	-
	AT 28 X 10 - 12	8.0 AT	7.5 AT; 8.5 AT	241	706	-	-	STD	6	TL	-
	AT 28 X 12 - 12	9.5 AT	8.5 AT; 9.0 AT	299	706	-	-	STD	6	TL	-

STD: Standard



AT 111

AT 111 is suitable for all-terrain sport racing with ATVs.
An "HD" version with a deep tread is available for users who need improved durability and traction.

Performance



Ø 8"	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS
		Rec.	Alt.								
	AT 18 X 10 - 8	8.0 AT	7.5 AT; 8.5 AT	254	457	-	-	STD	2	TL	-
	AT 18 X 10 - 8	8.0 AT	7.5 AT; 8.5 AT	254	457	-	-	STD	4	TL	-
	AT 20 X 11 - 8	9.0 AT	8.5 AT	282	508	-	-	STD	6	TL	-
	AT 22 X 11 - 8	9.0 AT	8.5 AT	282	559	-	-	STD	6	TL	-
Ø 9"	AT 18 X 10 - 9	8.0 AT	7.5 AT; 8.5 AT	254	457	-	-	STD	4	TL	-
	AT 20 X 11 - 9	9.0 AT	8.5 AT	279	508	-	-	STD	4	TL	-
	AT 20 X 11 - 9	9.0 AT	8.5 AT	279	508	-	-	STD	6	TL	-
	AT 22 X 11 - 9	9.0 AT	8.5 AT	282	559	-	-	STD	4	TL	-
	AT 22 X 11 - 9	9.0 AT	8.5 AT	282	559	-	-	STD	6	TL	-
Ø 10"	AT 18 X 10 - 10	8.0 AT	7.5 AT; 8.5 AT	254	457	-	-	STD	4	TL	-
	AT 19 X 6 - 10	5.0	-	152	472	-	-	STD	4	TL	-

STD: Standard



Ø 10"	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS
		Rec.	Alt.								
	20 X 6 - 10	5.0	-	152	500	-	-	STD	2	TL	-
	AT 20 X 6 - 10	5.0	-	152	500	-	-	STD	4	TL	-
	AT 20 X 11 - 10	9.0 AT	8.5 AT	275	508	-	-	STD	6	TL	-
	AT 21 X 7 - 10	5.5 AT	6.0 AT	178	541	-	-	STD	4	TL	-
	AT 21 X 7 - 10	5.5 AT	6.0 AT	178	541	-	-	STD	6	TL	-
	AT 22 X 11 - 10	9.0 AT	8.5 AT	282	559	-	-	STD	4	TL	-
	AT 22 X 7 - 10	5.5 AT	6.0 AT	175	559	-	-	STD	4	TL	-
	AT 22 X 11 - 10	9.0 AT	8.5 AT	282	559	-	-	STD	6	TL	-
	AT 22 X 7 - 10	5.5 AT	6.0 AT	175	559	-	-	STD	6	TL	-
	AT 22 X 8 - 10	6.5 AT	6.0 AT	208	559	-	-	STD	6	TL	-
	AT 23 X 7 - 10	5.5 AT	6.0 AT	178	584	-	-	STD	4	TL	-
	AT 23 X 7 - 10	5.5 AT	6.0 AT	178	584	-	-	STD	6	TL	-

STD: Standard



AT 111 HD

AT 111 HD is suitable for all-terrain sport racing with ATVs. The increased tread depth and the thick sidewall provide extra grip and braking control in addition to extraordinary traction and high-speed control in power slides. AT 111 HD ensures an extended tire life-cycle.



Technologies



Extra Deep Tread

Performance



Sport




Durability



Traction

Ø 9"	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS
		Rec.	Alt.								
	AT 20 X 11 - 9	9.0 AT	8.5 AT	275	515	-	-	STD	6	TL	-
	AT 22 X 11 - 9	9.0 AT	8.5 AT	279	560	-	-	STD	6	TL	-

STD: Standard

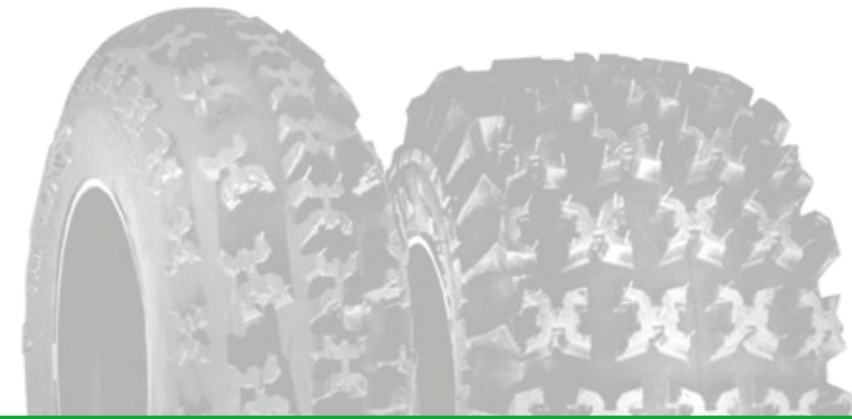

Ø 10"	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS
		Rec.	Alt.								
	AT 21 X 7 - 10	5.5 AT	6.0 AT	178	533	-	-	STD	6	TL	-
	AT 22 X 11 - 10	9.0 AT	8.5 AT	279	560	-	-	STD	6	TL	-
	AT 22 X 7 - 10	5.5 AT	6.0 AT	174	560	-	-	STD	6	TL	-
	AT 23 X 7 - 10	5.5 AT	6.0 AT	174	585	-	-	STD	6	TL	-

STD: Standard



Bias



AT 171

AT 171 has been specifically designed for mud bogger tractors. The special directional and extra-deep tread design provides excellent traction on wet and muddy surfaces.


Performance



Traction

Ø 14"	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS
		Rec.	Alt.								
	AT 28 X 9 - 14	W 7	W 6	205	715	-	-	STD	6	TL	77A8 / 53 F
	AT 30 X 9 - 14	W 7	W 6	211	755	-	-	STD	6	TL	77A8 / 53 F
Ø 16"	AT 31 X 9 - 16	W 7	W 6	211	785	-	-	STD	6	TL	80A8 / 56 F
Ø 18"	AT 33 X 8 - 18	W 6	W 5.5	200	845	390	2525	STD	6	TL	83A8 / 59 F
	AT 35 X 10 - 18	W 8	-	241	900	417	2646	STD	8	TT	90A8 / 66 F
	AT 35 X 10 - 18	W 8	-	241	900	417	2646	STD	8	TL	90A8 / 66 F
Ø 20"	AT 33 X 9 - 20	W 7	W 6	205	838	387	2616	STD	6	TL	85A8 / 61 F
	AT 35 X 9 - 20	W 7	W 6	200	895	419	2670	STD	6	TT	85A8 / 61 F
	AT 35 X 9 - 20	W 7	W 6	200	895	419	2670	STD	6	TL	85A8 / 61 F

STD: Standard

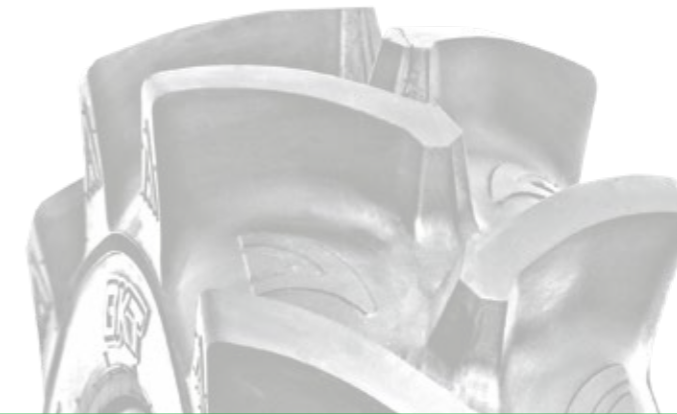

Ø 20"	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS
		Rec.	Alt.								
	AT 38 X 10 - 20	W 8	W 7	235	950	442	2835	STD	6	TT	93A8 / 69 F
	AT 38 X 10 - 20	W 8	W 7	235	950	442	2835	STD	6	TL	93A8 / 69 F
Ø 22"	AT 35 X 9 - 22	W 7	W 6	210	890	-	-	STD	6	TL	88A8 / 64 F
	AT 37 X 9 - 22	W 7	W 6	205	945	444	2778	STD	8	TT	88A8 / 64 F
	AT 37 X 9 - 22	W 7	W 6	205	945	444	2778	STD	8	TL	88A8 / 64 F
	AT 40 X 10 - 22	W 8	W 7	235	1005	469	2955	STD	8	TT	95A8 / 71 F
	AT 40 X 10 - 22	W 8	W 7	235	1005	469	2955	STD	8	TL	95A8 / 71 F
	AT 40 X 9 - 24	W 7	W 6	211	995	462	3112	STD	8	TL	90A8 / 66 F

STD: Standard





Bias



AT 108

AT 108 is an all-terrain tire suitable for ATVs.
Its tread design provides excellent comfort and performance on-and-off the road.

Performance



Comfort



On/Off Road

Ø 8"	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS
		Rec.	Alt.								
	AT 20 X 7 - 8	5.5 AT	6.0 AT	170	508	-	-	STD	4	TL	-
	AT 22 X 11 - 8	9.0 AT	8.5 AT	277	560	-	-	STD	4	TL	-
Ø 9"	AT 22 X 10 - 9	8.0 AT	7.5 AT; 8.5 AT	254	559	-	-	STD	4	TL	-
	AT 22 X 11 - 9	9.0 AT	8.5 AT	275	557	-	-	STD	4	TL	-
	AT 22 X 11 - 9	9.0 AT	8.5 AT	275	557	-	-	STD	6	TL	-
	AT 25 X 12 - 9	9.5 AT	9.0 AT; 10.0 AT	292	640	-	-	STD	4	TL	-
	AT 25 X 13 - 9	10.5 AT	10.0 AT	320	635	-	-	STD	4	TL	-
	AT 25 X 13 - 9	10.5 AT	10.0 AT	320	635	-	-	STD	6	TL	-
Ø 10"	AT 20 X 10 - 10	8.0 AT	7.5 AT; 8.5 AT	250	514	-	-	STD	4	TL	-
	AT 20 X 10 - 10	8.0 AT	7.5 AT; 8.5 AT	250	514	-	-	STD	8	TL	-
	AT 22 X 11 - 10	9.0 AT	8.5 AT	270	564	-	-	STD	4	TL	-
	AT 22 X 8 - 10	6.5 AT	6.0 AT	206	557	-	-	STD	4	TL	-
	AT 22 X 11 - 10	9.0 AT	8.5 AT	270	564	-	-	STD	6	TL	-
	AT 22 X 8 - 10	6.5 AT	6.0 AT	206	557	-	-	STD	6	TL	-
	AT 23 X 10 - 10	8.0 AT	7.5 AT; 8.5 AT	259	594	-	-	STD	4	TL	-
AT 23 X 8 - 10	6.5 AT	6.0 AT	210	594	-	-	STD	4	TL	-	

STD: Standard



Ø 10"	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS
		Rec.	Alt.								
	AT 24 X 11 - 10	9.0 AT	8.5 AT	284	608	-	-	STD	4	TL	-
	24 X 11 - 10	9.0	-	284	608	-	-	STD	6	TL	-
	AT 25 X 12 - 10	9.5 AT	9.0 AT; 10.0 AT	298	630	-	-	STD	4	TL	-
	AT 25 X 12 - 10	9.5 AT	9.0 AT; 10.0 AT	298	630	-	-	STD	6	TL	-
Ø 11"	AT 22 X 7 - 11	5.5 AT	-	181	557	-	-	STD	4	TL	-
	AT 23 X 8 - 11	6.5 AT	6.0 AT	191	594	-	-	STD	4	TL	-
	AT 23 X 8 - 11	6.5 AT	6.0 AT	191	594	-	-	STD	6	TL	-
	AT 24 X 10 - 11	8.0 AT	7.5 AT; 8.5 AT	254	615	-	-	STD	4	TL	-
	AT 24 X 8 - 11	6.5 AT	6.0 AT	206	610	-	-	STD	4	TL	-
	AT 24 X 9 - 11	7.0 AT	7.5 AT	220	605	-	-	STD	4	TL	-
	AT 24 X 9 - 11	7.0 AT	7.5 AT	220	605	-	-	STD	6	TL	-
Ø 12"	AT 25 X 10 - 12	8.0 AT	6.5 AT; 7.5 AT; 8.5 AT	254	640	-	-	STD	4	TL	-
	AT 25 X 8 - 12	6.5 AT	6.0 AT	212	630	-	-	STD	4	TL	-
	AT 25 X 10 - 12	8.0 AT	6.5 AT; 7.5 AT; 8.5 AT	254	640	-	-	STD	6	TL	-
	AT 25 X 8 - 12	6.5 AT	6.0 AT	212	630	-	-	STD	6	TL	-

STD: Standard



AT 109

AT 109 is an all-terrain tire for ATVs. Its tread design provides excellent field protection.



Performance



Ø 6"	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS
		Rec.	Alt.								
	AT 145 X 70 - 6	4.5	-	137	366	-	-	STD	2	TL	-
Ø 7"	AT 16 X 8 - 7	6.5 AT	6.0 AT	183	419	-	-	STD	2	TL	-
Ø 8"	AT 18 X 9.5 - 8	7.5 AT	8.0 AT	220	468	-	-	STD	2	TL	-
	AT 20 X 7 - 8	5.5 AT	6.0 AT	170	504	-	-	STD	2	TL	-
	AT 21 X 9 - 8	7.0 AT	6.5 AT; 7.5 AT	222	536	-	-	STD	2	TL	-
	AT 22 X 11 - 8	9.0 AT	8.5 AT	230	579	-	-	STD	2	TL	-
Ø 9"	AT 25 X 12 - 9	9.5 AT	9.0 AT; 10.0 AT	269	617	-	-	STD	2	TL	-

STD: Standard



AT 110

AT 110 is BKT's tire suitable for all-terrain applications with ATVs. Thanks to its extraordinary steering control, AT 110 is the ideal front axle tire for your vehicle.



Performance



Ø 8"	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS
		Rec.	Alt.								
	AT 20 X 7 - 8	5.5 AT	6.0 AT	183	508	-	-	STD	4	TL	-
Ø 9"	AT 21 X 8 - 9	6.5 AT	6.0 AT	204	541	-	-	STD	4	TL	-
Ø 10"	AT 21 X 7 - 10	5.5 AT	6.0 AT	178	531	-	-	STD	4	TL	-
	AT 22 X 8 - 10	6.5 AT	6.0 AT	204	548	-	-	STD	4	TL	-
	AT 23 X 7 - 10	5.5 AT	6.0 AT	178	584	-	-	STD	4	TL	-

STD: Standard



AT 112

AT 112 is an all-terrain tire for ATVs. It is particularly suitable for sport performance.

Performance



Ø 8"	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS
		Rec.	Alt.								
	AT 20 X 10 - 8	8.0AT	7.5AT; 8.5AT	240	510	-	-	STD	4	TL	-
Ø 10"	AT 20 X 10 - 10	8.0AT	7.5AT; 8.5AT	240	510	-	-	STD	4	TL	-
Ø 12"	AT 23 X 10 - 12	8.0AT	7.5AT; 8.5AT	240	585	-	-	STD	4	TL	-

STD: Standard



AT 119

AT 119 is suitable for both all-terrain and lawn and garden applications with mowers. Its tread design provides excellent field protection.



Performance



Ø 8"	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS
		Rec.	Alt.								
	AT 22 X 11 - 8	9.0AT	8.5AT	280	580	-	-	STD	2	TL	-
	AT 22 X 11 - 8	9.0AT	8.5AT	280	580	-	-	STD	4	TL	-

STD: Standard



Load Index Table

The load index is a code that defines a tire's maximum weight capacity at the speed given by its speed index provided that the usage conditions recommended by the Manufacturer are fully complied with.

Corresponding values of load index (LI) and load capacity per wheel (kg)

LI	kg	LI	kg	LI	kg	LI	kg
50	190	85	515	120	1400	155	3875
51	195	86	530	121	1450	156	4000
52	200	87	545	122	1500	157	4125
53	206	88	560	123	1550	158	4250
54	212	89	580	124	1600	159	4375
55	218	90	600	125	1650	160	4500
56	224	91	615	126	1700	161	4625
57	230	92	630	127	1750	162	4750
58	236	93	650	128	1800	163	4875
59	243	94	670	129	1850	164	5000
60	250	95	690	130	1900	165	5150
61	257	96	710	131	1950	166	5300
62	265	97	730	132	2000	167	5450
63	272	98	750	133	2060	168	5600
64	280	99	775	134	2120	169	5800
65	290	100	800	135	2180	170	6000
66	300	101	825	136	2240	171	6150
67	307	102	850	137	2300	172	6300
68	315	103	875	138	2360	173	6500
69	325	104	900	139	2430	174	6700
70	335	105	925	140	2500	175	6900
71	345	106	950	141	2575	176	7100
72	355	107	975	142	2650	177	7300
73	365	108	1000	143	2725	178	7500
74	375	109	1030	144	2800	179	7750
75	387	110	1060	145	2900	180	8000
76	400	111	1090	146	3000	181	8250
77	412	112	1120	147	3075	182	8500
78	425	113	1150	148	3150	183	8750
79	437	114	1180	149	3250	184	9000
80	450	115	1215	150	3350	185	9250
81	462	116	1250	151	3450	186	9500
82	475	117	1285	152	3550	187	9750
83	487	118	1320	153	3650	188	10000
84	500	119	1360	154	3750	189	10300

Speed Index Table

The speed code is a value that indicates the maximum admitted speed at which the tire can carry the weight corresponding to its load index provided that the usage conditions recommended by the Manufacturer are fully complied with.

Speed index	A1	A2	A3	A4	A6	A8	B	C	D	E	F	J
Km/h	5	10	15	20	30	40	50	60	65	70	80	100
mph	3	6	9	12	19	25	31	37	40	43	50	62



Corporate Office

Balkrishna Industries Ltd.

BKT HOUSE, C/15, Trade World, Kamala Mills Compound, Senapati Bapat Marg, Lower Parel, Mumbai - 400013, India
 Tel: (+91) 22-6666 3800 - Fax: (+91) 22-6666 3898/99 - e-mail: info@bkt-tires.com - bkt-tires.com

BKT Europe srl

Viale Della Repubblica,133
 20831 Seregno (MB), Italy
 Tel: (+39) 0362 33 03 28
 (+39) 0362 32 51 07
 Fax: (+39) 0362 23 24 72

BKT USA Inc.

202 Montrose West, Suite 240/250
 Copley, (Akron) Ohio 44321, USA
 Tel: (+1) 330 836 1090
 Fax: (+1) 330 836 1091
 Toll Free: (+1) 888 660 0662

BKT Tires (CANADA) Inc.

55 York Street, Suite 401
 Toronto, Ontario M5J 1R7, Canada
 Tel: AG/IND (+1) 905 641 5636
 OTR (+1) 780 888 5667
 Fax: (+1) 416 229 1711



bkt-tires.com

Proud Sponsor of



OFFICIAL OFF-HIGHWAY TIRE OF THE KFC BBL

